


STANDARD DIMENSIONS OF WOOL FELT: wheels – sheets – rolls

WHEELS, POLISHING WHEELS

made of conventional wool felt (white/gray)

Thickness: 10 - 120 mm
Diameter: 100 - 800 mm
Hole: according to customer requirements
Density: 0.36 – 1.00 g/cm³ *(depending on the thickness)*

Other dimensions/densities on request.

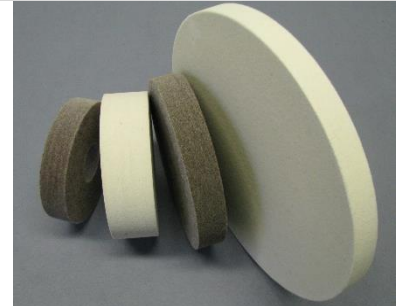

SHEETS, PADS, BLOCKS

made of conventional wool felt (white/gray)

Length/Width: thickness 3 - 25 mm: approx. 1000 x 1000 mm
 thickness 26 - 55 mm: approx. 800 x 800 mm
 thickness 56 - 120 mm: approx. 600 x 450 mm
Density: 0.36 – 0.70 g/cm³ *(depending on the thickness)*

Other dimensions/densities on request.



ROLLS, BALES

made of conventional wool felt (white/gray)

Thickness: 3 - 30 mm
Width: approx. 1100 - 1800 mm
Density: 0.18 – 0.56 g/cm³ *(depending on the thickness)*

Other dimensions/densities on request.



Description of densities according DIN 61200

NAME	DENSITY	NAME	DENSITY	NAME	DENSITY	NAME	DENSITY
W1	0.08 g/cm ³	M1	0.18 g/cm ³	F1	0.32 g/cm ³	H1	0.52 g/cm ³
W2	0.10 g/cm ³	M2	0.20 g/cm ³	F2	0.36 g/cm ³	H2	0.56 g/cm ³
W3	0.12 g/cm ³	M3	0.22 g/cm ³	F3	0.40 g/cm ³	H3	0.60 g/cm ³
W4	0.14 g/cm ³	M4	0.25 g/cm ³	F4	0.44 g/cm ³	H4	0.64 g/cm ³
W5	0.16 g/cm ³	M5	0.28 g/cm ³	F5	0.48 g/cm ³	H5	0.68 g/cm ³
		M6	0.30 g/cm ³				

APRIL 2021